


DATA SHEET

IMPERA SIERRA II

8-BUTTON CONTROL PAD WITH ETHERNET PORT

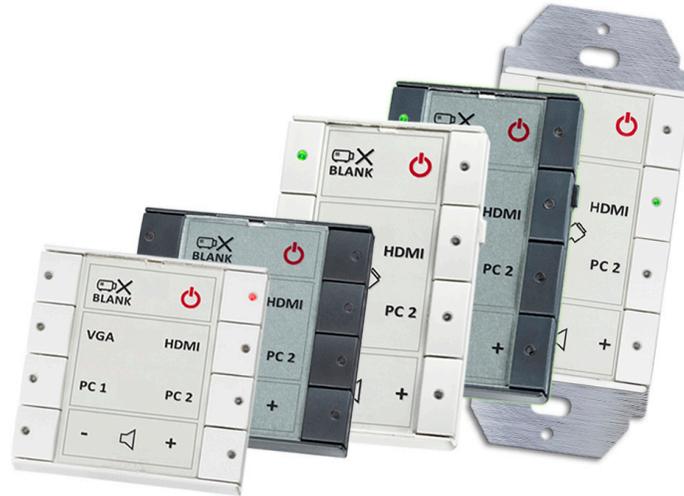

The Impera Sierra II control pad is a compact, highly customizable AV control suitable for wall-mounting or installation in the EasyConnect tabletop cable management solution. It provides a simple and intuitive interface for presentation spaces, learning environments, and conference rooms, regardless of the type of equipment installed.

The Sierra II can be quickly programmed and customized within Project Designer as the needs of the room change over time, making it a very flexible and cost effective control solution. The Sierra II also offers extensive control features through a built-in web server.

FEATURES

- Supports up to 8 software-configurable buttons
- Includes on-board controller; no external processor required
- Controls up to 10 third party devices over Ethernet
- 1 bi-directional RS-232/IR port for third party control with feedback
- 2 uni-directional RS-232/IR ports for third party control
- 3 GPIO ports
- Built-in web server
- Micro USB connection for system configuration and maintenance
- Supports email notifications for lamp/filter hours and warnings
- Expansion Bus supports up to 5 additional devices (keypads and port expanders)
- Covered by Biamp Systems' five-year warranty


ARCHITECTS & ENGINEERS SPECIFICATION

The control pad shall include 8 mechanical buttons for initiating control functions. The control pad shall include 8 multicolor, software configurable LEDs. Each mechanical button shall have a corresponding LED. The control pad shall utilize an Ethernet network via an RJ-45 connector for networking as well as software configuration and control. The control pad shall include 1 bi-directional RS-232/IR port for controlling third party devices with feedback functionality and shall be software programmable. The control pad shall include 2 uni-directional RS-232/IR ports for controlling third party devices and shall be software programmable. The control pad shall include 3 channels of General Purpose Input and Output connection (GPIO) for sending or receiving logic signals. The programming of the GPIO ports shall be software configurable. The control pad shall include a web server. The control pad shall be powered by PoE (IEEE 802.3at Class 1, 4W) or 12V DC. The control pad shall be CE marked and shall be compliant with the RoHS directive. Warranty shall be five years. The control pad shall be the Impera Sierra II.

IMPERA SIERRA II SPECIFICATIONS

Control		Power	
Button Quantity:	8	Main:	12V DC 5W
Button Type:	Mechanical	PoE:	IEEE 802.3at Class 1, 4W
LED Indicators:	Multi-color	EU Model Dimensions	
Ethernet		Height:	2.2 inches (55 mm)
Port Speed:	10/100 Mbps	Width:	2.2 inches (55 mm)
Autosense:	Yes	Depth:	0.7 inches (17 mm)
Number of Devices Supported:	10	DK Model Dimensions	
GPIO		Height:	1.8 inches (45 mm)
I/O Quantity:	3	Width:	2.8 inches (72 mm)
Sense Low:	< 1 VDC	Depth:	0.7 inches (17 mm)
Sense High:	> 4 VDC	US Model Dimensions	
Output Type:	Open drain	Height:	4.1 inches (105 mm)
Max Voltage:	24 VDC	Width:	1.8 inches (45 mm)
Max Current:	0.5 A	Depth:	0.9 inches (24 mm)
RS-232 / IR		Weight:	0.20 lbs (90 g)
Number of Ports:	1 (bidirectional) 2 (unidirectional)	Environmental	
Baud Rate:	1200 - 115200 bit/sec	Ambient Operating Temperature Range:	32 - 104° F (0 - 40° C)
Data Bits:	7, 8	Humidity:	10-90% relative humidity (non-condensing)
Parity:	Even, Odd, None	Altitude:	0-6,600 ft (0-2000m) MSL
Stop Bits:	1, 1.5, 2	Compliance	
IR Frequency Range:	381 Hz to 500 kHz	CE Marked (Europe) RoHS Directive (Europe)	
Expansion Bus			
Output Power:	12 V DC (0.3 A)		
Number of Devices Supported:	5		

IMPERA SIERRA II REAR PANEL (US MODEL)

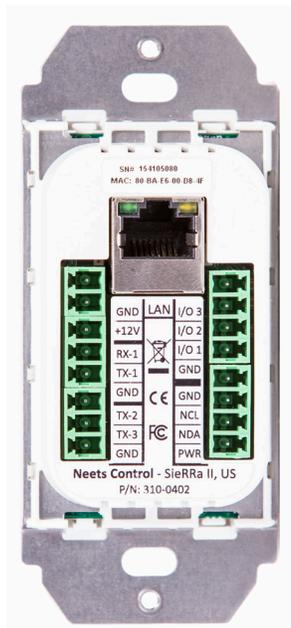

IMPERA SIERRA II MODELS

8DKW	DK form factor, white
8DKB	DK form factor, black
8EUW	EU form factor, white
8EUB	EU form factor, black
8USW	US form factor, white

Biamp and Impera are either trademarks or registered trademarks of Biamp Systems, LLC in the United States and other countries. Other product names referenced may be trademarks or registered marks of their respective owners and Biamp Systems is not affiliated with or sponsored by these companies.